












Black Pitch 150325



White 150101



Silver 150300



Suffolk Stone 150305



Moles Paw 150302



London 150120





## Antibes



Marsala 150236




Ochre 150204




Rust 150248



Charlston 150112



Chalk 150108



Elephant 150105






# Antibes








Patrol 150412





### Antibes

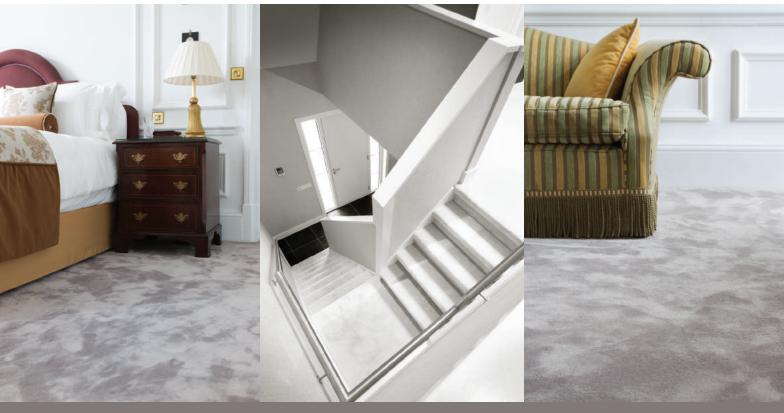

### **Specification**

Construction

Pile Material

Secondary Backing

Pile Weight

Total Weight

Carpet Thickness

Usage Classification EN 1307:2014

Comfort rating EN1307:2014

Static Electricity Charge

Light ISO 105 B02:2013

Rubbing - Dry ISO 105 X12

Rubbing - Wet ISO 105 X12

Water ISO 105 E01: 2013

Water Stains En1307 / EN15115

TOG rating

Burn Behaviour BS EN ISO 9239-1:2002

Stair Suitability

Widths

Cut Length service

Standard Rug sizes

Bespoke Rug service

: Tufted 1/10 cut pile

: Faux Silk

: Luxury Backing

: ca. 1.85 kg / sq mtr +/- 7.5%

: ca. 2.60 kg / sq mtr +/- 7.5%

: ca. 14 mm +/- 7.5%

: Class 33 / Heavy Commercial use

: LC 5

: Anti static

: 5-6

: 4-5

: 4-5

. /

: 4-5

: 1.64

: Bfl-S1

: Yes

: 4mtr +/- 1%

: Yes

: No

: Yes

**Matching:** This sample may not be from the same batch as current stocks and should be used only as a guide.

**Installation:** Professional installation is recommended and essential to a good quality underlay. Avoid exposure direct sunlight. Areas that might receive prolonged exposure to direct sunlight should be protected by the use of blinds or curtains.

**Maintenance:** To maintain your carpets appearance it is recommended that it is vacuumed at least three times per week to remove particles of dirt and dust. It should be noted that overtime foot traffic will flatten the pile in main walkways causing areas of differential wear. This can cause the carpet to show areas of light and dark shading, this happens to all quality of velour carpets and would not be accepted as a basis of any complaint.

